

Power Transducer Series

MULTI POWER MONITOR


(4 digital displays)

Functions & Features

- Measures simultaneously several variables of a heavy-current power system: current, voltage, active, reactive and apparent power, active and reactive energy, power factor, frequency, etc.
- All measured values, counter values, display mode, setting data are stored in the non-volatile memory at the power off
- Conversion factors, system configuration, interval times are programmable using the front keys
- Open collector output for alarm or energy count
- CE marking

Typical Applications

- Multi-functional power monitor incorporated in an electric device: saves space, wiring works, and cost

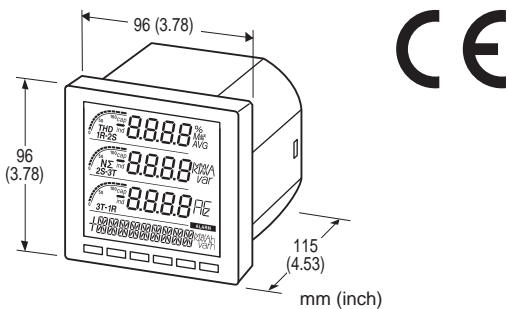

MODEL: 53U-1[1][2][3]-AD4[4]

ORDERING INFORMATION

- Code number: 53U-1[1][2][3]-AD4[4]
- Specify a code from below for each [1] through [4].
(e.g. 53U-1211-AD4)

CONFIGURATION

- 1: Single-phase / 2-wire and 3-wire,
3-phase / 3-wire and 4-wire

[1] INPUT

- 1: 480 V / 1 A AC
2: 480 V / 5 A AC

[2] CONTACT INPUT

- 0: None
('External Interface' codes 1, 4 and 5 Not selectable.)

- 1: 24 V DC
('External Interface' codes 2, 3, 6, 7, 8 and 9 Not selectable.)
2: 110 V DC
('External Interface' codes 2, 3, 6, 7, 8 and 9 Not selectable.)

[3] EXTERNAL INTERFACE

- 1: Modbus, Do × 1, Di × 1
2: 4 - 20 mA DC × 4
3: 1 - 5 V DC × 4
4: 4 - 20 mA DC × 2, Do × 1, Di × 1
5: 1 - 5 V DC × 2, Do × 1, Di × 1
6: 4 - 20 mA DC × 2, Do × 2
7: 1 - 5 V DC × 2, Do × 2
8: Modbus, Do × 3
9: Do × 4

AUXILIARY POWER SUPPLY

AD4: 100 - 240 V AC / 110 - 240 V DC (universal)

[4] OPTIONS

PERFORMANCE

blank: Standard

/H: High accuracy (voltage/current: ±0.2 %, energy: ±0.5 %)

RELATED PRODUCTS

- PC configurator software (model: PMCFG)
- PC Recorder Light software for the 53U (model: MSR128LUX) Software downloadable at M-System's web. Software downloadable at M-System's web site. A dedicated cable is required to connect the module to the PC. Please refer to the internet software download site or the users manual for the PC configurator for applicable cable types.

GENERAL SPECIFICATIONS

Construction: 96-mm square (1/4 DIN size) panel flush mounted

Degree of protection

Front panel: IP 50

Terminal block, housing: IP 30

Connection

Voltage input: Connector type terminal block
(applicable wire size ≤ 2.5 dia, 0.5 - 3.5 mm²)

Current input: Screw terminal block
(applicable wire size ≤ 2.4 dia, 0.5 - 3.5 mm²)

Output, power: Connector type terminal block
(applicable wire size ≤ 2.4 dia, 0.5 - 2.5 mm²)

Configuration: Single phase/2-wire and 3-wire, 3-phase/3-wire balanced/unbalanced load, 3-phase/4-wire balanced/unbalanced load

Housing material: Flame-resistant resin (gray)
Isolation: Voltage input to current input to contact input to network interface or configurator jack or analog output to contact output (between each contact output except for External Interface code 8) to power

• **Measured variables**

Voltage: 1 - N, 2 - N, 3 - N, 1 - 2, 2 - 3, 3 - 1

Current: 1, 2, 3, N

Average current: 1, 2, 3

Active / reactive / apparent power: 1, 2, 3, Σ

Power factor: 1, 2, 3, Σ

Frequency

Phase angle between voltages: 1 - 2, 2 - 3, 3 - 1

Active energy incoming / outgoing: Σ

Reactive energy inductive / capacitive: Σ

Apparent energy: Σ

Active / reactive / apparent power intervals (demand)

Other demands

Harmonic contents: 2nd to 31st

Max. and min. values

■ **DISPLAY:** LCD with LED backlight

(LED OFF timer available)

Signed: 4 digits, 3 lines

Energy: 9 digits, 1 line

Bargraph: 3 points

INPUT SPECIFICATIONS

Frequency: 50 / 60 Hz (45 - 65 Hz)

• **Voltage Input**

Rated voltage

Line-to-line (delta voltage): 480 V

Line-neutral (phase voltage): 277 V

Consumption VA: $\leq U_{LN}^2 / 300 \text{ k}\Omega / \text{phase}$

Overload capacity: 200 % of rating for 10 sec., 120% continuous

Selectable primary voltage range: 50 - 400 000 V

• **Current Input**

Rated current: 1 A or 5 A

Consumption VA: $\leq I^2 \cdot 0.01 \Omega / \text{phase}$

Overload capacity: 4000 % of rating for 1 sec., 2000% for 4 sec., 120% continuous

Selectable primary current range: 1 - 20 000 A

Operational range

Voltage, current, apparent power: $\leq 120 \%$ of the rating

Active/reactive power: $\leq \pm 120 \%$ of the rating

Frequency: 45 - 65 Hz

Power factor: $\leq \pm 1$

• **Contact Input:** 24 V DC or 110 V DC

(input resistance 6 k Ω)

Detecting voltage: External 24 V DC $\pm 10 \%$ or 110 V DC $\pm 10 \%$

ON current: $\geq 1 \text{ mA}$ ($\leq 24 \text{ k}\Omega @ 24 \text{ V}$, $\leq 110 \text{ k}\Omega @ 110 \text{ V}$)

OFF current: $\leq 0.1 \text{ mA}$ ($\geq 240 \text{ k}\Omega @ 24 \text{ V}$, $\geq 1.1 \text{ M}\Omega @ 110 \text{ V}$)

Detecting time: 10 - 1000 msec.

The status can be monitored on the Modbus; usable to reset energy count or to update average (demand) value.

OUTPUT SPECIFICATIONS

• **Network Interface**

Transmission: Half-duplex, asynchronous, no procedure

Interface: Conforms to EIA RS-485

Max. transmission distance: 500 meters

Baud rate: 1.2 - 38.4 kbps

Max. number of nodes: 31 (except the master)

Protocol: Modbus RTU

Media: Shielded twisted-pair cable (CPEV-S 0.9 dia.)

• **DC Current Output:** 4 - 20 mA DC

Load resistance: $\leq 270 \Omega$

Measurands converted into analog output: Voltage, Current, Active / reactive / apparent power, Power factor, Frequency, Harmonic contents

• **DC Voltage Output:** 1 - 5 V DC

Load resistance: $\geq 5000 \Omega$

Measurands converted into analog output: Voltage, Current, Active / reactive / apparent power, Power factor, Frequency, Harmonic contents

• **OPEN COLLECTOR**

Programmable for either alarm or energy count.

Max. rated load: 130 V DC @50 mA

Continuous rated load: 130 V DC @30 mA

Saturation voltage: 1.5 V DC

Measurands applicable to alarm: Voltage, current, current intervals, neutral current, frequency, energy, energy intervals

(ON delay, deadband and other parameters are selectable)

Measurands applicable to count: Energy;

Pulse rate selectable within

0.1 - 10 000.0 kWh/p, kvarh/p, kVAh/p

INSTALLATION

Power input

• **AC:** Operational voltage range 85 - 264 V
47 - 66 Hz; $< 8 \text{ VA}$

• **DC:** Operational voltage range 99 - 264 V
 $< 4 \text{ W}$; ripple 10 % p-p max.

Operating temperature: -10 to +55°C (14 to 131°F)

Storage temperature: -20 to +80°C (-4 to +176°F)

Operating humidity: 90 % RH max. (non-condensing)

Mounting: Panel flush mounting

Weight: 300 g (0.66 lbs)

PERFORMANCE

Accuracy (at 23°C ±10°C or 73.4°F ±18°F, 45 – 65 Hz)

Voltage: ±0.3 % (±0.2 % for Option /H)*

Current: ±0.3 % (±0.2 % for Option /H)*

Power: ±0.5 %*

Power factor: ±0.5 %

Frequency: ±0.1 %*

Energy: ±1 % (±0.5 % for Option /H)

Harmonic contents: ±1 %*

Analog output: Accuracy of assigned measurand or ±0.2 %, whichever is greater.

* In percentage of the spans: 480 V for voltage, 1 A or 5 A for current, 4155 W (5 A) or 831 W (1 A) for active power. The described accuracy levels are ensured at the input 1 % or more for phase 2 current with 3-phase/3-wire unbalanced load, for neutral current with 3-phase/4-wire unbalanced load, and neutral current with 1-phase/3-wire.

Response time: ≤ 2 sec. (0 – 99 %),

≤ 3 sec. for frequency and harmonic contents

Sampling time:

Harmonic contents and frequency: ≤ 1.1 sec.

Other: ≤ 600 msec.

Insulation resistance: ≥ 100 MΩ with 500 V DC

(voltage input to current input to contact input to network interface or configurator jack or analog output to contact output to power)

Between each contact output except for External Interface code 8.

Dielectric strength:

4000 V AC @1 minute

(voltage input or current input or contact input or contact output or network interface or configurator jack or analog output to power)

2500 V AC @1 minute

(voltage input to current input to contact input to contact output to network interface or configurator jack or analog output)

2000 V AC @1 minute

(between each contact output except for External Interface code 8)

2000 V AC @1 minute (circuits to housing)

STANDARDS & APPROVALS

CE conformity:

EMC Directive (2004/108/EC)

EN 61000-6-4 (EMI)

EN 61000-6-2 (EMS)

Low Voltage Directive (2006/95/EC)

EN 61010-1

Installation Category III

Pollution Degree 2


IEC standard: IEC 62053-22 class 0.5s

IEC 62053-23 class 2

(IEC standards are applicable with Option /H only)

MOUNTING REQUIREMENTS mm (inch)

■ PANEL CUTOUT unit: mm (inch)


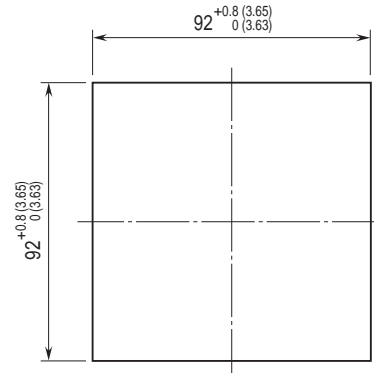


Panel thickness : 2 to 15 mm (0.08 to 0.59 inch)


EXTERNAL VIEW

■ FRONT VIEW

■ REAR VIEW

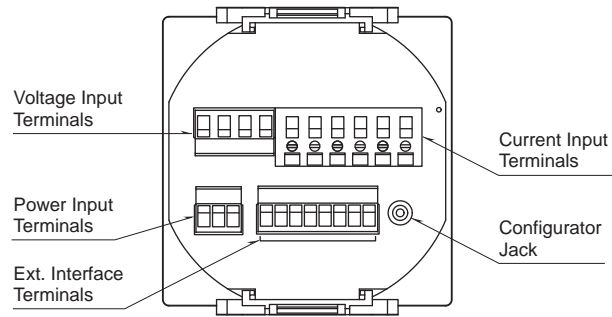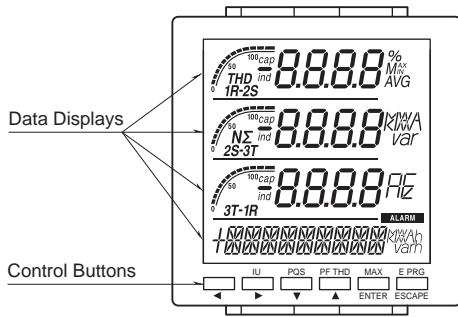


TERMINAL CONNECTIONS

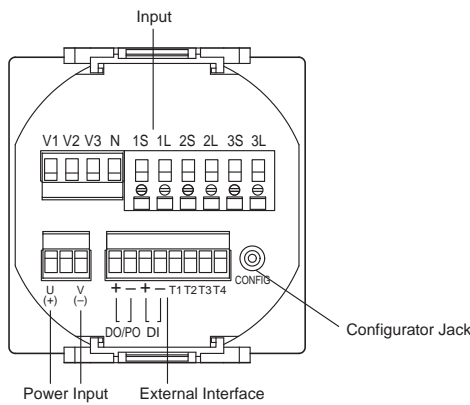


System / Application	Terminal
Three phase / 3-wire, unbalanced load	
Three phase / 4-wire, balanced load	
Three phase / 3-wire, balanced load	
Three phase / 4-wire, unbalanced load	
Single phase / 2-wire	
Single phase / 3-wire	


EXTERNAL INTERFACE CODE: 1

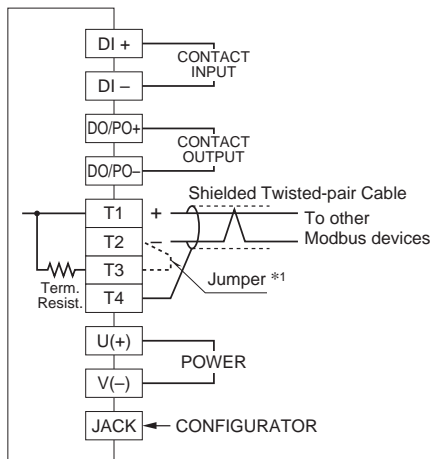


EXTERNAL INTERFACE CODE: 2

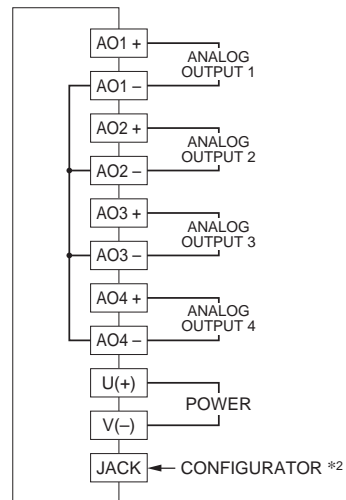


EXTERNAL INTERFACE CODE: 4, 5

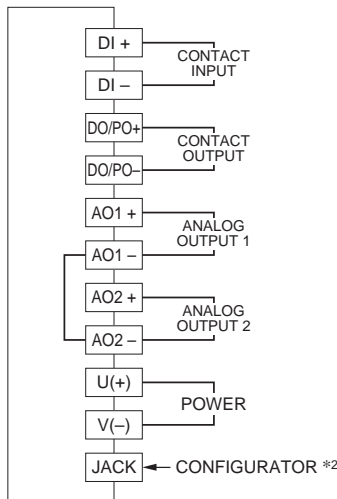


EXTERNAL INTERFACE CODE: 6, 7

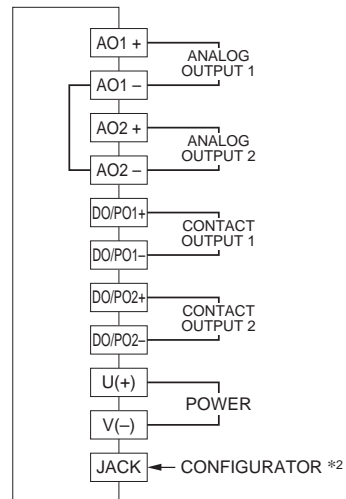


EXTERNAL INTERFACE CODE: 8

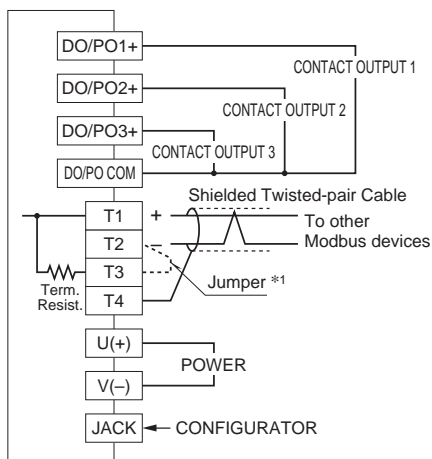


EXTERNAL INTERFACE CODE: 9

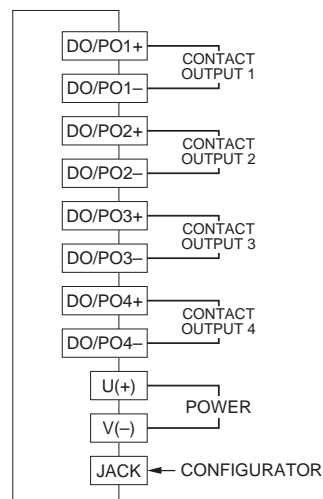

• Contact Input Connection E.g.




• Contact Output Connection E.g.



*1. When the device is located at the end of a transmission line via twisted-pair cable, (when there is no cross-wiring), close across the terminal T2 - T3 with a leadwire. When the device is not at the end, no shortcircuit wire is required.


*2. Analog output may momentarily fluctuate while the configurator cable is left connected.

MODBUS WIRING CONNECTION

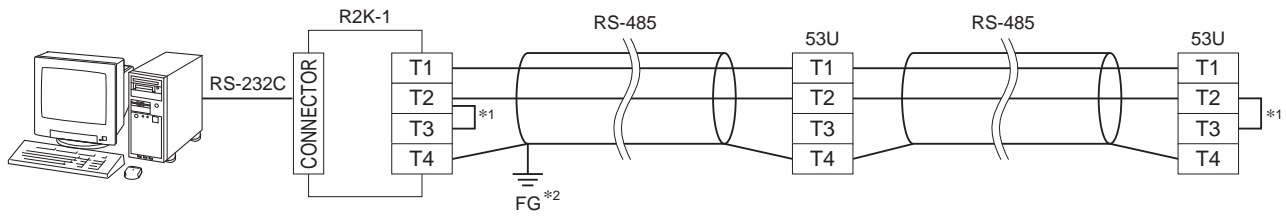


- *1. Internal terminating resistor is used when the device is at the end of a transmission line.
- *2. Install shield cables to all sections and ground them at single point.

DIMENSIONS unit: mm (inch)

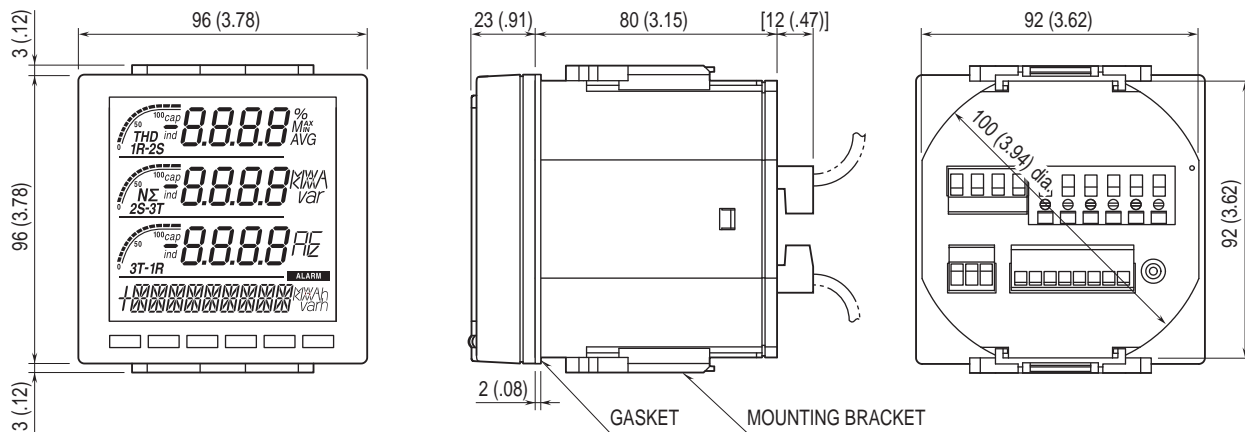


SYSTEM CONFIGURATION EXAMPLES

■ RS-485 / RS-232C

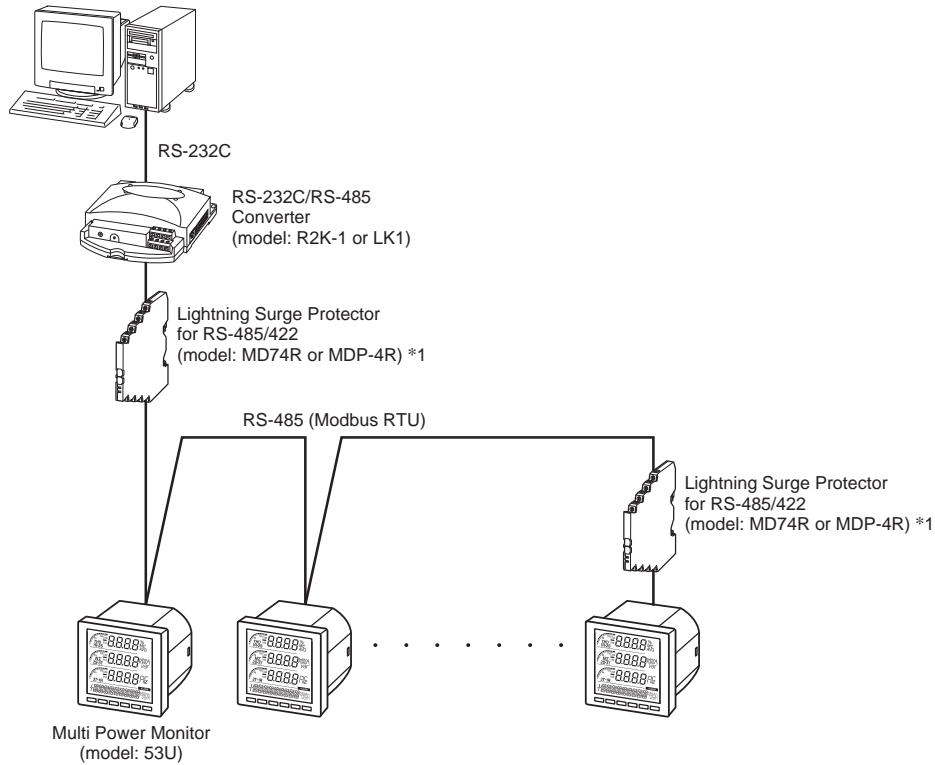

■ RS-485 / ETHERNET

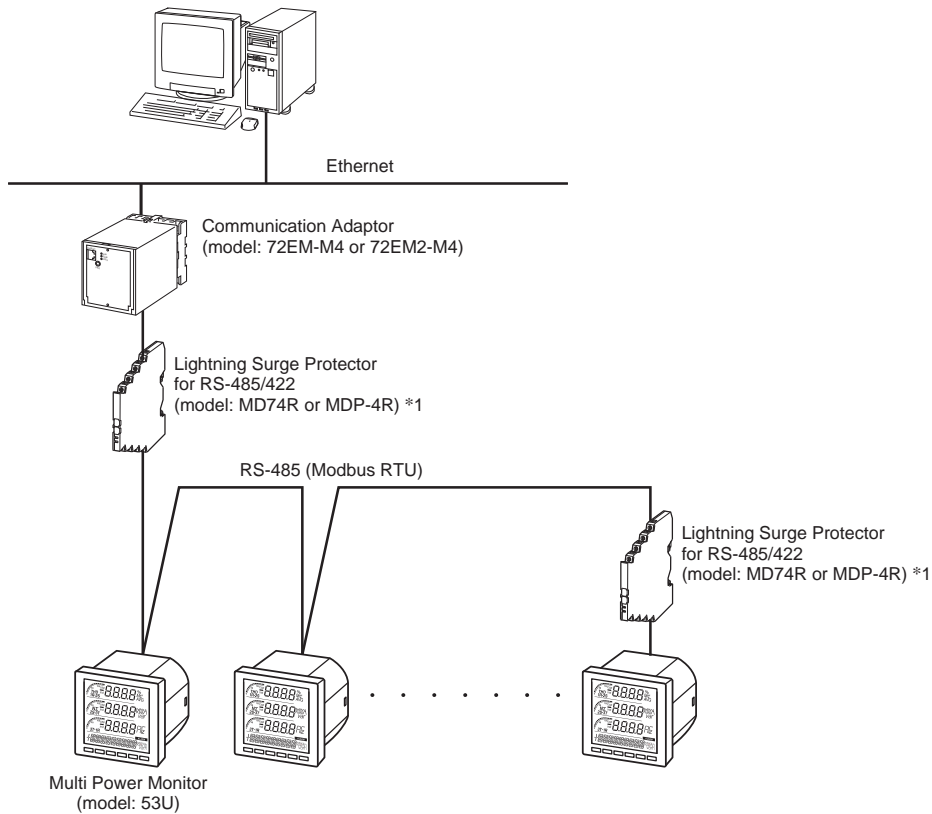

*1. Insert lightning surge protectors recommended in this example if necessary.



Specifications are subject to change without notice.